

19 ▶

remote control, removable dishwasher-safe grease filters and halogen lighting. Not to mention Italian good looks.

An alternative to the traditional range hood is the Sirius Power Pack, which is concealed into custom wall-mounted or island-style vent hood canopies or can be matched with a stainless steel screen for under-cabinet mount applications.

Environment-Friendly Oil Remover

Oil and paint spills are common on construction sites and can be frustrating to clean up with toxic solvents and cleaners. **Environmental Building Science Inc.** has developed a new product that claims to clean better than most industrial-strength cleaners yet is certified as non-toxic under the Eco-logo program.



Oil Lift™ starts breaking down the oil in a stain upon contact. Waste can be flushed into lawns or onto gravel, where natural bacteria will digest the remaining components. Oil Lift can remove grease and oil from driveways, vehicles, engines, appliances, floors, fabrics and more.

Non-Rigid Sound Barriers

SoundSense LLC offers a range of high-performance, flexible noise barriers that can be used for various applications. SoundSense



PACIFIC LASER SYSTEMS

The Professional Standard


PLS² / PLS²E

Palm Laser® Plumb, Level and Square Hand Held Laser Line Tool



This SELF LEVELING laser line tool, for INDOOR-OUTDOOR mid-range layout tasks, offers more utility than traditional layout tools.

ACCURACY WITH DETECTOR 1/4 IN. @ 100 FT.

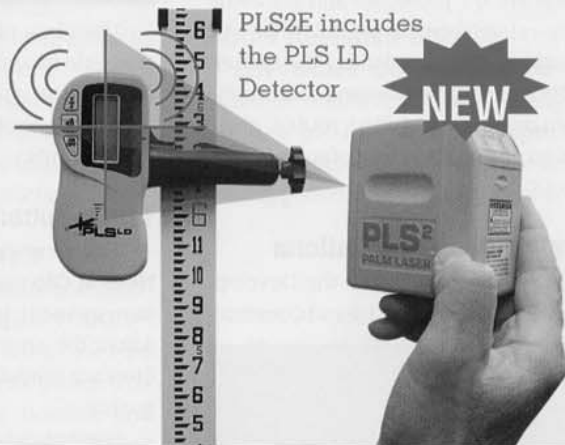

PLS²E includes the PLS LD Detector

- Battery operated, 3 AA
- PLS²E Includes wall bracket, carrying pouch, PLSLD detector and case

- Brighter than most rotary lasers at a fraction of the cost
- Compatible with your PLS wall bracket or tripod

Made In USA

WWW.PLSLASER.COM • 1 800 601 4500

NEW PRODUCT
2005
SHOWCASE

LV-1 is 1/8" thick and weighs only 1lb. per square foot, but it can stop the passage of sound through floors, ceilings or walls. Noise-Out 2™, slightly thicker and heavier, is loaded with high-density inert fillers, making it an ideal barrier for airborne noise. The LV-A, at 1-1/8" thickness, is designed to stop plumbing and HVAC transmitted noises and to solve home theatre noise problems. For reducing or eliminating the noise of machinery, SoundSense offers the QB111, a composite of the LV-1 and quilted fibreglass.

zones throughout the house, mounted at floor level near potential problem areas. If a sensor detects water, it sends an electronic signal to the automated control panel, which then emits an audible and/or visual alarm before turning off the main water supply.

FloodStopper can be installed in new construction or retrofitted into existing homes.

Through the Roof Waterproof Sealant

The rainy spring season can present a challenge to roofing contractors, often delaying


work until roof surfaces are dry. Enter **Sascho's** Through the Roof — a clear, flexible caulk that permanently seals around rooftop fixtures, wet or dry. It repels water immediately after application, is UV resistant, remains elastic (allowing it to absorb significant degrees of movement) and never dries hard or brittle.

Through the Roof can be applied to custom tile, brick, wood and shingles and, unlike asphalt, it does not blacken rooftop fixtures or leave black patches. It is available in cartridges and VOC brush grade quarts and gallons.

Flood Detector and Stopper

Unlike most water/flood detection devices, the FloodStopper System from **FirstSmart Sensor Corp.** is more than just an alarm. After a leak is detected, FloodStopper uses a valve on the main water line to automatically shut the water off and prevent a flood.

Multiple sensors, available in either hard-wire or wireless versions, are placed in key

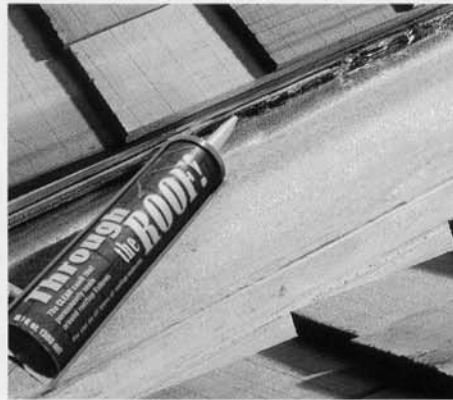

E-Z Stone Decorative Coating

Builders can achieve the look of stone over vertical or horizontal surfaces of concrete, masonry, drywall or pressure-treated wood in three easy



► 22

EZ PLANK™

SIMPLIFY YOUR LIFE WITH THE ULTIMATE EZ-2-INSTALL FLOATING HARDWOOD FLOORING

Minimal skills required.

Cut labour costs by up to 75%.

No Sub-Contractor needed.

May be installed with or without glue over a 1/8" (3mm) underpad (not included).

Install an average room in a few hours.

Fixed-length boards permit a variety of patterns with little waste.

*Pre-finished with 8 coats of **DURALOX**, high density UV polyurethane with aluminum oxide.*

THIS D.I.Y. SPECIALIST JUST ASK JON EAKES



Look for me on HGTV and D.I.Y. Network.



EZ-LOC™



EZ-LOC

"Exceptional quality engineered floating hardwood flooring that installs fast and easily with regular tools!"

AVAILABLE ACROSS CANADA AT:



please come and visit us at: www.ezplank.com E-mail: info@ezplank.com